

## Flexiprint IP20

5730, single colour, ultra bright

FP4-x01D-500

### Specifications




Voltage	24V
Current	3.6A
Wattage	17.28W/m
Number of LEDs	420pcs
Length of stripe	5m
Viewing angle	120°
Min. bending radius (edges/corners)	30mm
Operating temperature	-15 to +40°C
Storage temperature	-25 to +60°C
CE/RoHS compliant	




### Benefits

Adhesive tape on backside  
Cuttable every ~84mm

### Electrical and optical characteristics (Ta=25°C)

Part number	Colour	CCT	Intensity lm/m	EEC
FP4-N01D-500	 warm-white	2800-3500°K	2016	F
FP4-S01D-500	 natural-white	3800-5000°K	2100	E
FP4-W01D-500	 cold-white	5500-7000°K	2100	E

### Dimensions

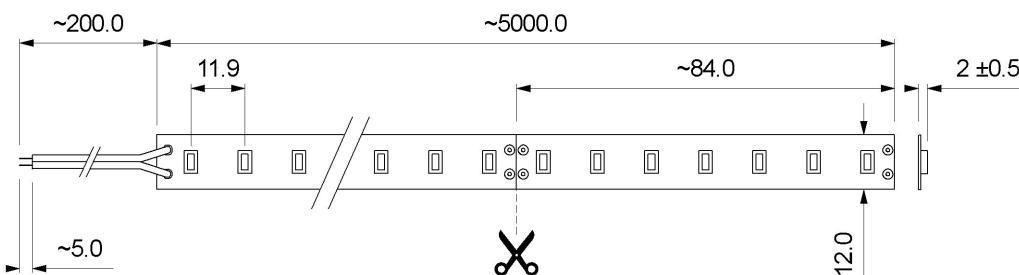

1. All dimensions are in millimetres
2. Length tolerance ±1%
3. All strandet wires cross section 0.2mm<sup>2</sup> AWG #24
4. Specifications are subject to change without notice

Please also take note of our **General Information for Flexiprint and LED Modules**