

L0-Series 16.0 x 6.0mm

High bright (LED type 2835)

Specifications

| | |
|-----------------------|-----------------------|
| Dimensions | 16.0 x 6.0 mm (W x H) |
| Voltage | 24V |
| Current | ~1A/m |
| Wattage | 23W/m |
| Brightness | ~ 1400lm/m |
| Number of LED's | 112pcs/m |
| Operating Temperature | -20°~+40°C |
| Storage Temperature | -40°~+80°C |
| Viewing Angle | ~110° |
| CE | |
| RoHS compliant | |




Further technical information in „Profile Specifications“

| Profile Type | Colour of Profile | Length of Profile (incl. end-caps) | Cover | Cable Input | Cable Output | Cable Length | Connector | Mounting Clip | Lightsource | Voltage |
|--------------|--|--|-------------------------|---------------------------|-----------------------------------|---|----------------------------------|----------------------------------|----------------------------------|----------------|
| L0 | 1 natural anodized other colours on request | 027 270mm* | 1 white diffused | 1 lateral cable input | 1 lateral cable output | 050 50cm other length on request | 0 without connector (wire leads) | 0 without clips | N01 warm-white 2800-3500K | D 24VDC |
| | | 039 390mm* | | | | | | | | |
| | | 046 460mm* | 2 rear cable input | 2 without cable | 1 with DC-Jack input output | | 1 with clips 2 clips per unit | W01 cold-white 5500-6500K | | |
| | | 058 580mm* | | | | | | | 2 rear cable output | |
| | | 064 640mm* | 3 rear cable output | | | | | | | |
| | | 082 820mm* | | | | | | | | |
| | | 089 890mm* | | | | | | | | |
| | | 095 950mm* other length on request *Tolerance: +/-2mm | | | | | | | | |



Warning: Do not connect more than 3m in a row

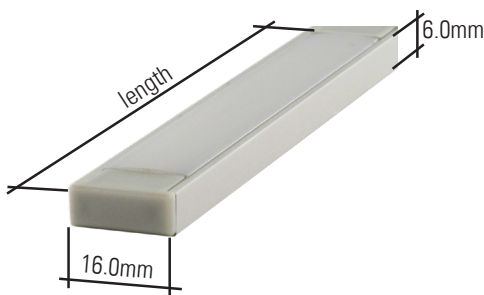

1. All dimensions are in millimetres
 2. Tolerance is ±0.25mm unless otherwise specified
 3. Specifications are subject to change without notice